

### **LUNE TRAINING TABLE**

### **FIXED SUPPORT BAR**

Model Number: FCTTB-MOD.72


#### **IMPORTANT NOTES:**

- 2 Person installation
- Please Read Instructions Before Use
- Place all components on a clean and smooth surface during installation
- Loosely secure screws and bolts until the table is completely assembled, then tighten


## Parts List

PART#		NAME	QUANTITY
A		Allen Wrench	1
В		Set Screw	4
С		Wood Screw Ø4.2*20	7
D	Ca	Support Screw Ø3.5*12	2
Е		Pad	1
F		Top Support	1
G		Worksurface Bolt M6*20	8
Н		Bar Support	2
I		Adjustable Leaver Cap	1
J	QÔ	Locking Caster	4
0		Cable Clips	2
К		Fixed Support Bar	1
L		Worktop	1
М		Modesty	1
N	I	Base Kit	1


# Installation Steps

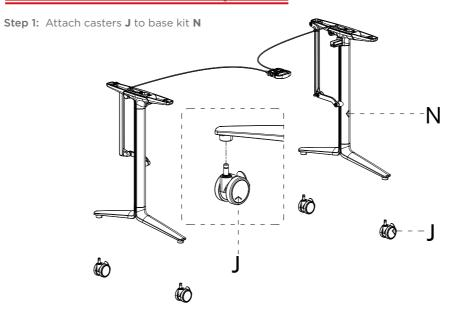


Step 3: Secure the fixed support bar **K** to the base kit **N** using (4) set screws **B**.

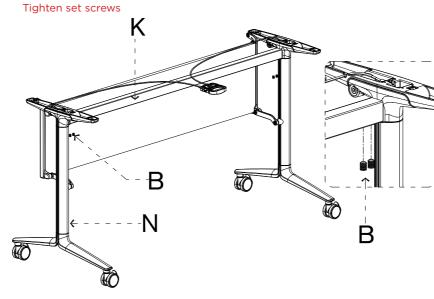


Step 5: Secure top support  ${\bf F}$  to fixed support bar  ${\bf K}$  using support screws  ${\bf D}$  and top with pad  ${\bf E}$ 

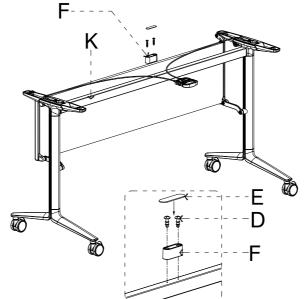


**Step 2:** Attach fixed support bar **K** to base kit **N** using (2) bar supports **H**Position modesty panel **M** within the modesty brackets of base kit **N** 

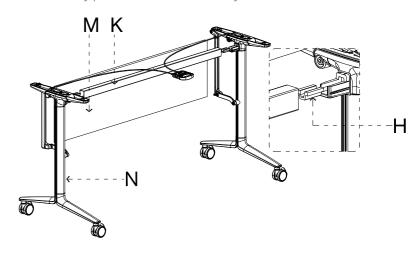

Step 4: Secure modesty panel M to base kit N using (4) wood screws C

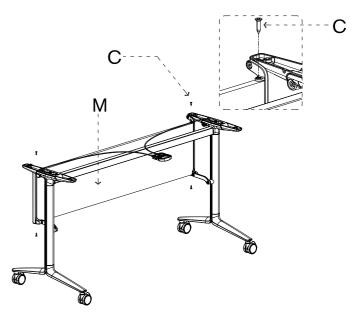


Step 6: Flip the base onto the backside of the worktop  $\bf L$  as shown in image Step 7: Secure the base kit  $\bf N$  to the work top  $\bf L$  with (4) worktop bolts  $\bf G$ 

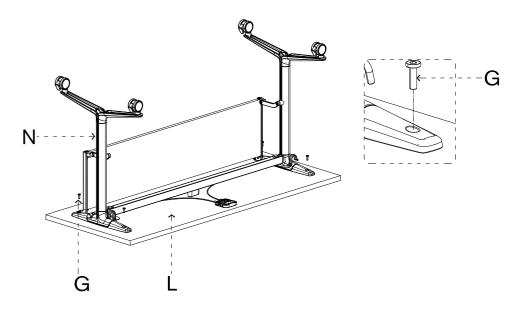


Step 8: Secure the lever to the work top L with (3) wood screws C

**LEVER** 


Step 9: Fold the base kit N by pulling on the lever. Step 10: Secure the base kit N to the work top L with (4) work top bolts G

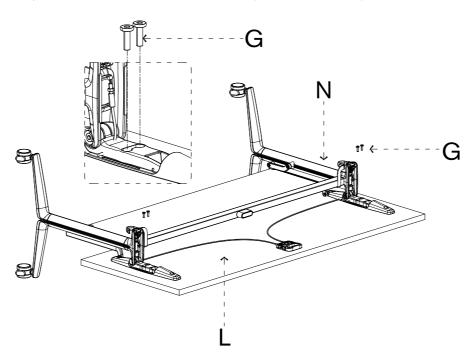


Step 11: Secure cords with cord clip O, and cap off leaver with leaver cap I

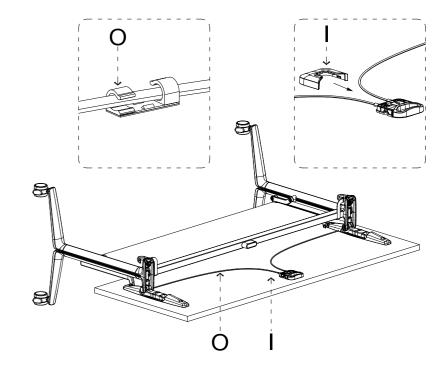

Step 12: Turn table right side up



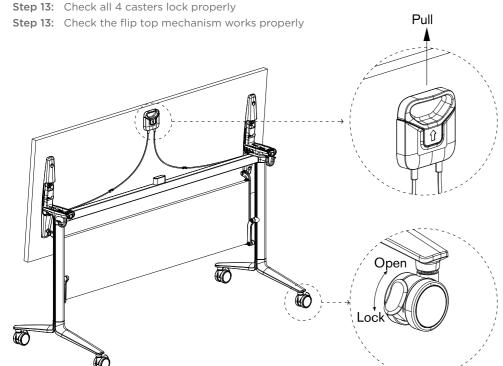

Completed Installation:

